


TwoThermostat Uni 2Tled

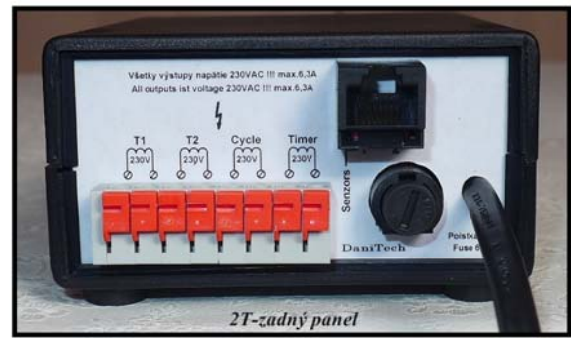

**Thermostat is intended to control temperature in two different places.
Application: in hatchery, incubator, terrarium, greenhouse.**

Funkcie:

**2 x Thermostat – heating
1 x Timer
1 x Cycler**

Setting:



**Day's temperature 5,0 to 99,9°C, step 0,1°C
Night's temperature 5,0 to 99,9°C, step 0,1°C
Hysteresis 0,1 to 10,0°C, step 0,1°C
Sound alarm of minimum and maximum temperature.
Transition time day/night
Real time
Timer switch on/off time
Impulse repetition time, impulse duration
Cycling start/stop time**

Equipment consists of:

**2 x sensor DS 18b20 on the cables of length 2m, it is ended with connector RJ45.
4 x output 230VAC, connection by means of terminal board into the section of 1mm²**

Outputs:

**Voltage 230VAC!!!
Fuse 6,3A, common for all outputs
Maximum current 6A
Outputs are designed for connection of 2.class equipment.**

Size:


92 x 53 x 125 mm

If 1.class equipment is used, connect terminal PE

Only qualified personnel (knowledge of corresponding EI.standard) is authorized to connect equipment !!!.

Setting



MENU:

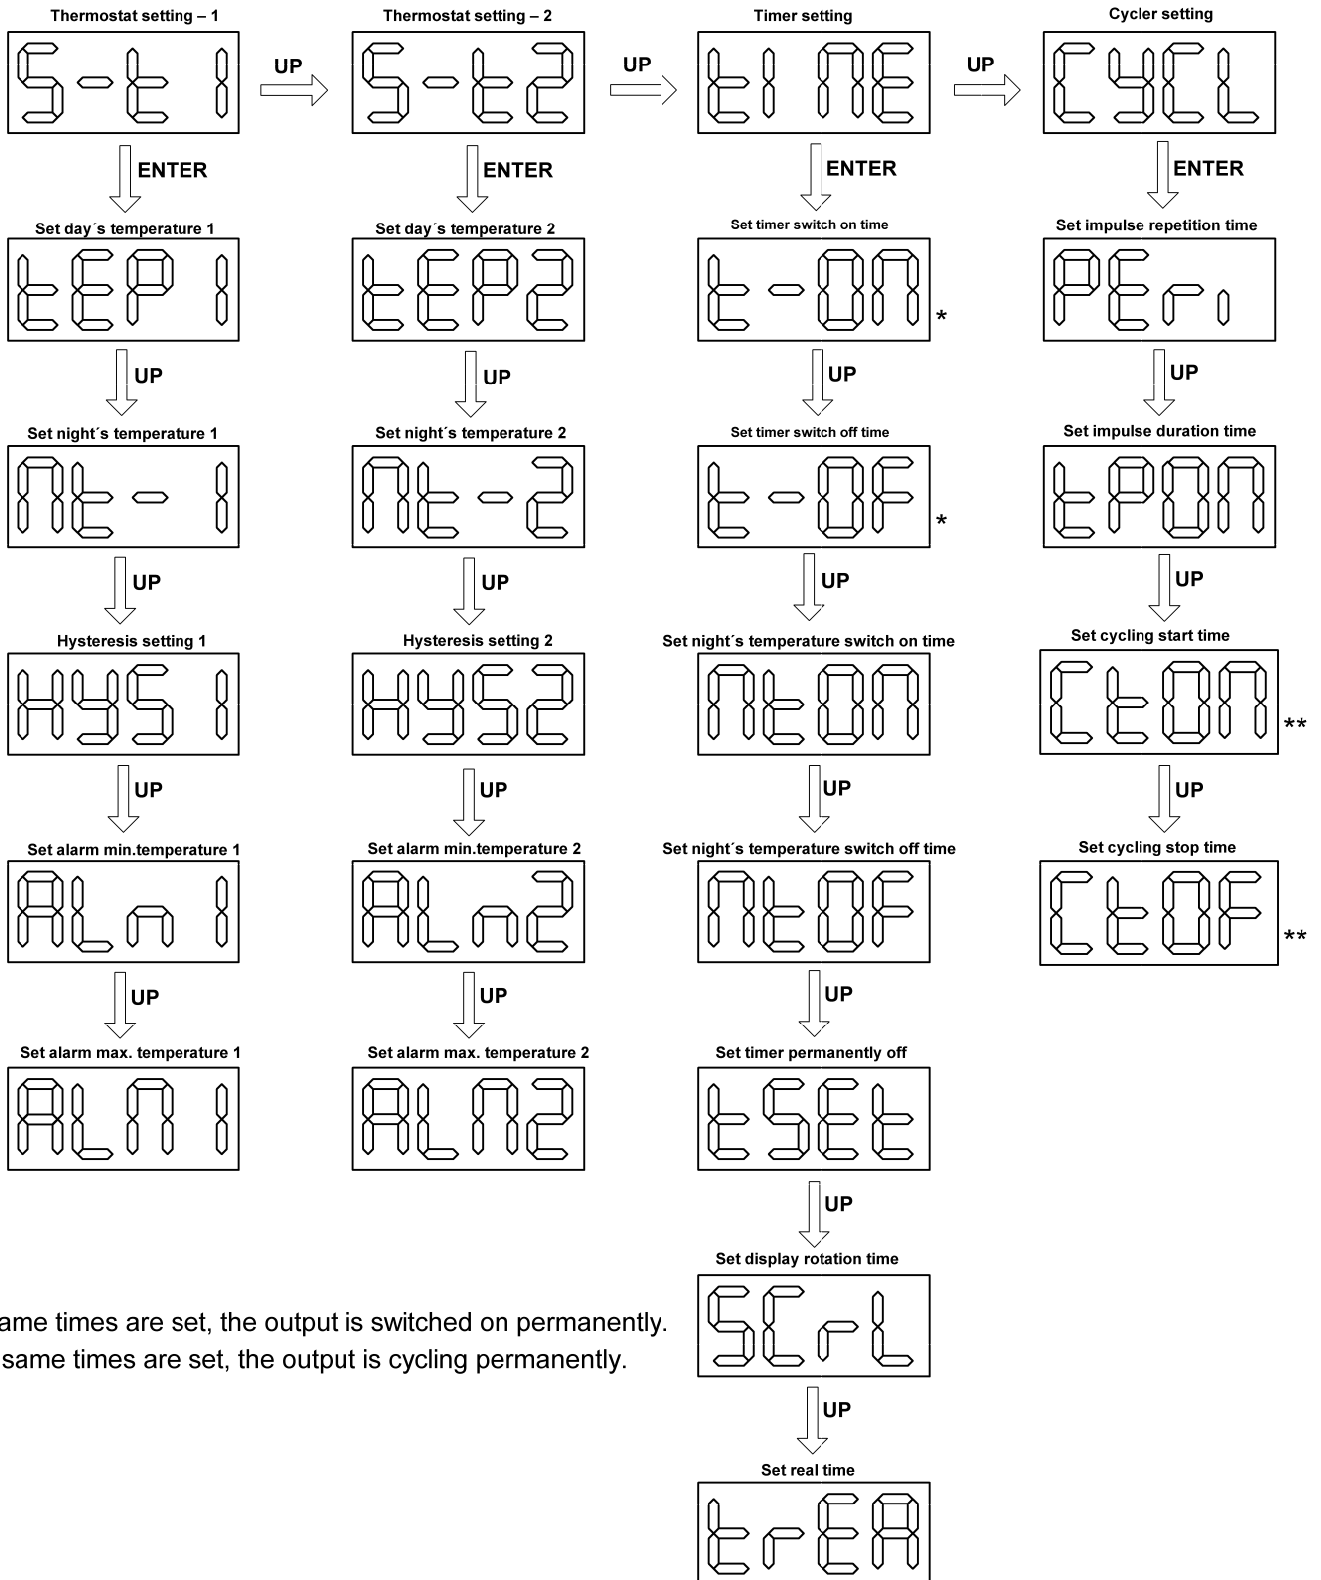

*If same times are set, the output is switched on permanently.

** If same times are set, the output is cycling permanently.

Description

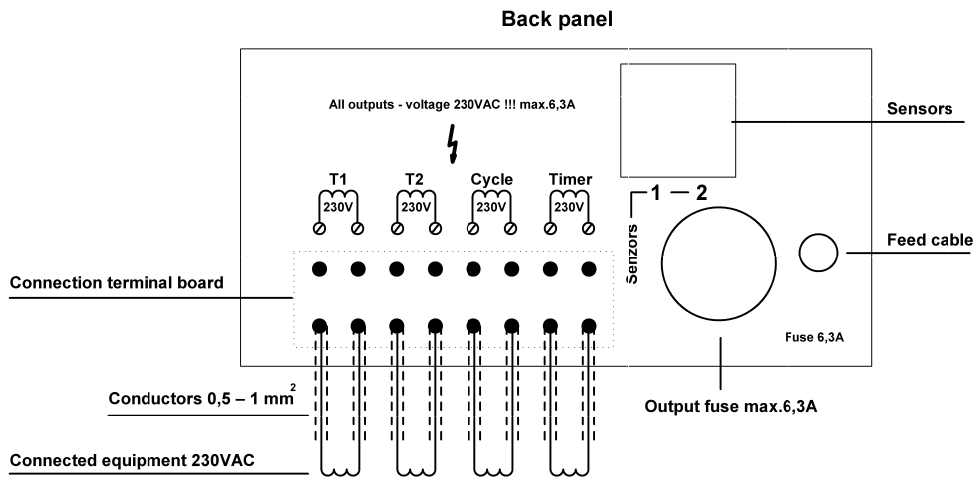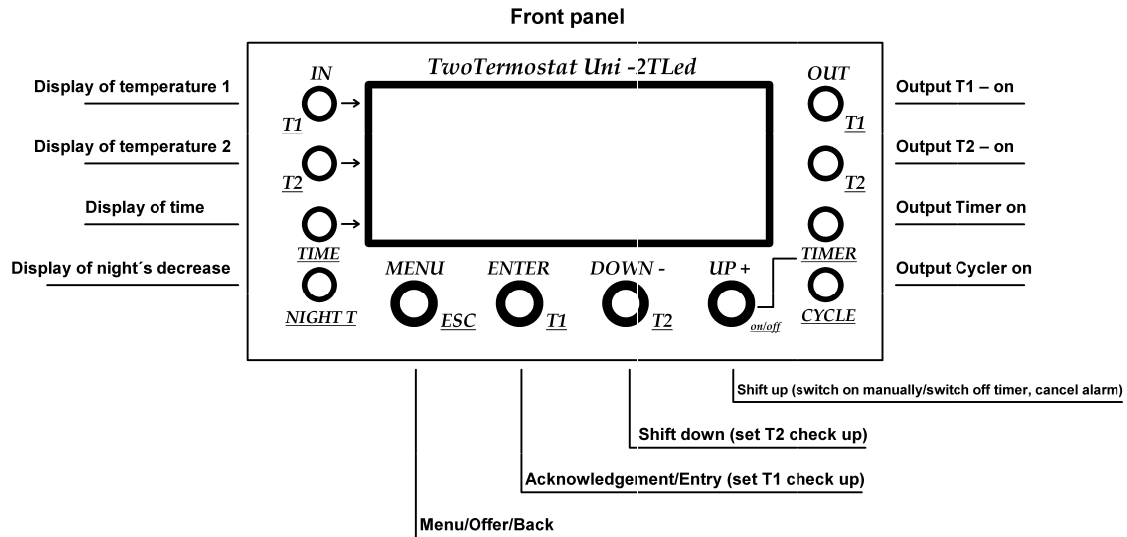

Attention: Output voltage 230VAC!!!

Only qualified personnel (knowledge of EI standard) is authorized to connect equipment.