


FourThermostat Uni 4Tled

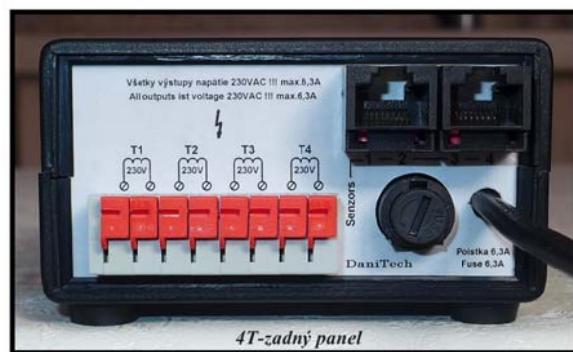

**Thermostat is intended to control temperature in four different places.
Application: in hatchery, incubator, terrarium, greenhouse.**

Functions:

4 x Thermostat – heating

Setting:

**Day's temperature 5,0 to 99,9°C, step 0,1°C
Night's temperature 5,0 to 99,9°C, step 0,1°C
Hysteresis 0,1 to 10,0°C, step 0,1°C
Sound alarm of minimum and maximum temperature.
Transition time day/night
Real time**

Equipment consists of:

**4 x sensor DS 18b20 on the cables of length 2m, it is ended with connector RJ45.
4 x output 230VAC, connection by means of terminal board into the section of 1mm²**

Outputs:

**Voltage 230VAC!!!
Fuse 6,3A, common for all outputs
Maximum current 6A
Outputs are designed for connection of 2.class equipment.**

Size:


92 x 53 x 125 mm

If 1.class equipment is used, connect terminal PE


Only qualified personnel (knowledge of corresponding EI standard) is authorized to connect equipment !!!.

Setting

MENU:

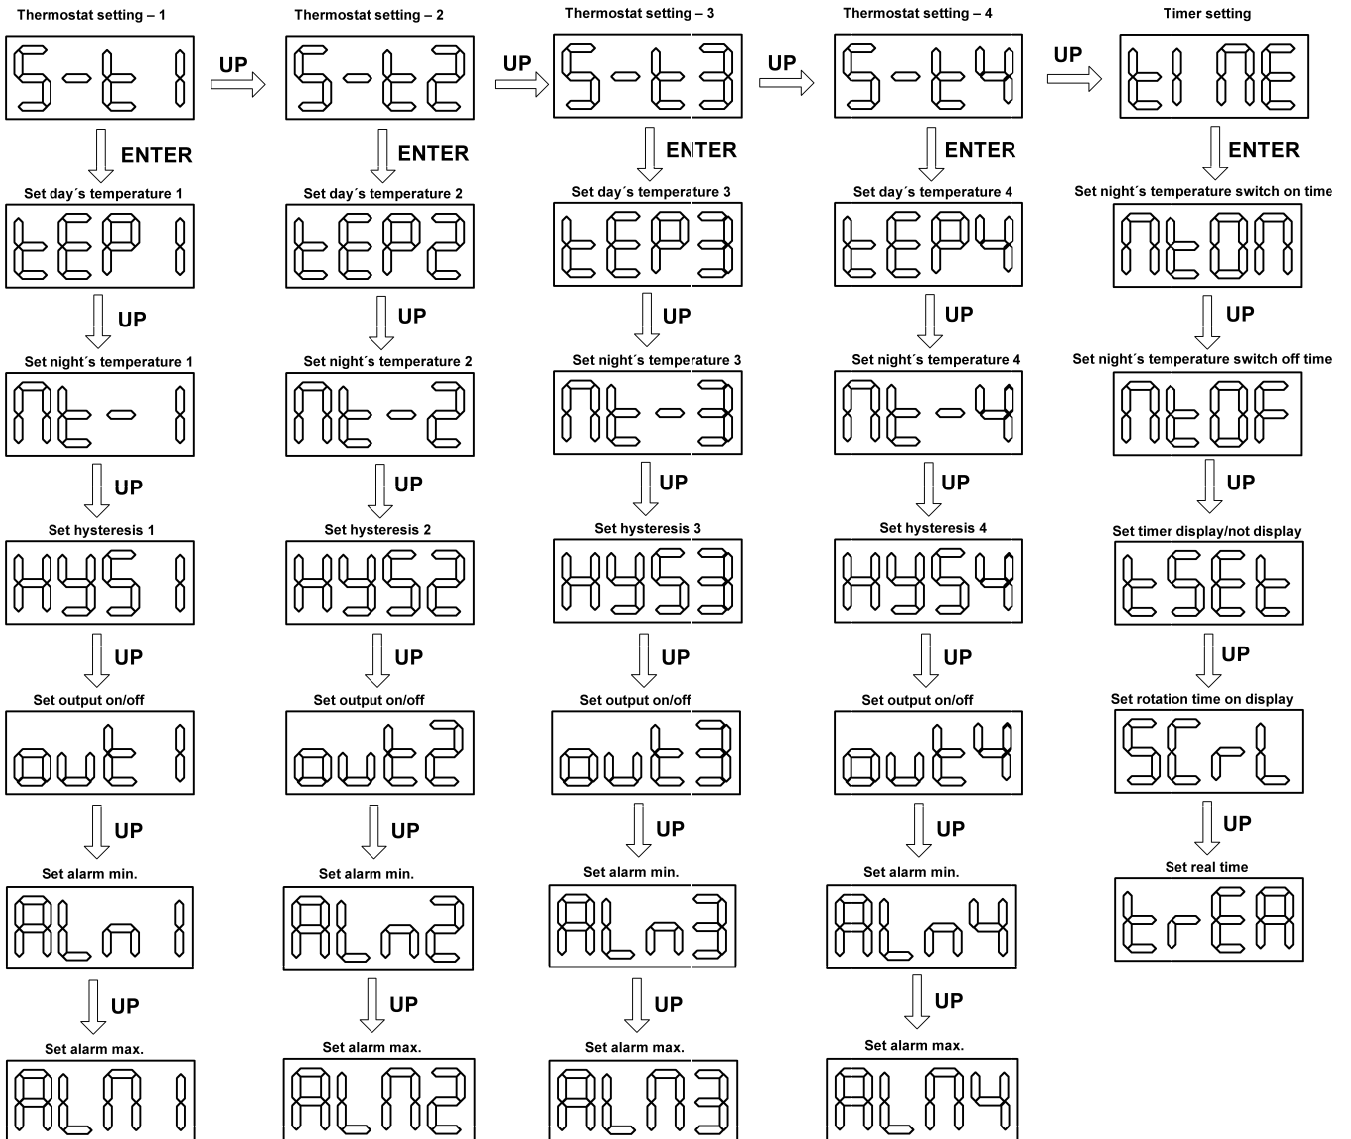

Description

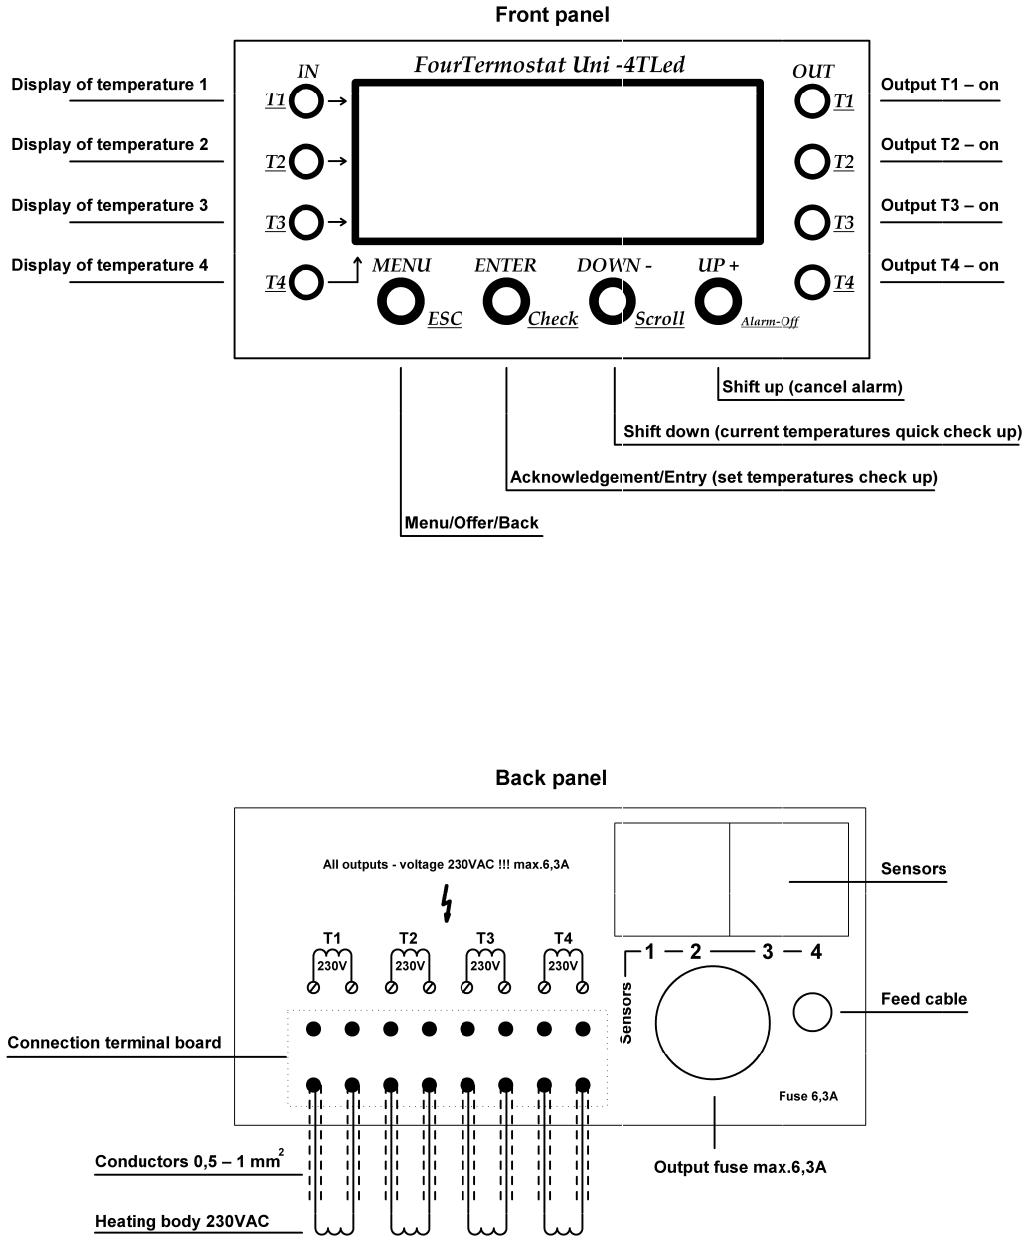

Only qualified personnel (knowledge of EI standard) is authorized to connect equipment.